

Coaxial Bandpass Filter



ECO ZX75-12-S+
50Ω 9 to 15 MHz

Features

- High Rejection
- Sharp Insertion Loss roll off
- Shielded case



Applications

- High rejection applications
- Image rejection
- IF signal processing
- Receivers / Transmitters
- Test Lab

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25 W at 25°C
Permanent damage may occur if any of these limits are exceeded.	

Outline Drawing (HY1239)

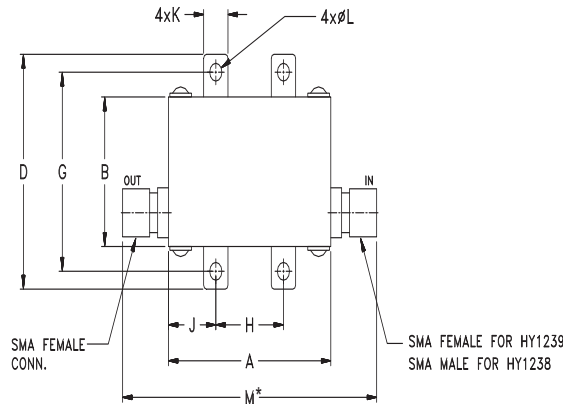

Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3.5dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
12	9 - 15	7.5	18	7	20 - 3000	1.5	2.2	30

Outline Dimensions (inch/mm)

A	B	C	D	E	F
1.20	.75	.46	1.18	.04	.17
30.48	19.05	11.68	29.97	1.02	4.32


G	H	J	K	L	M	wt.
1.00	.50	.35	.18	.106	1.88	grams
25.40	12.70	8.89	4.57	2.69	47.75	35.0

* Note: M dimension is 2.05 inch (52.07 mm) for HY1238 Case Style.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.3	100.39	1737.18
7.0	53.30	62.05
7.5	36.73	35.46
8.0	14.55	9.74
8.2	5.51	2.37
8.5	3.45	2.36
9.0	1.85	1.22
11.0	1.31	1.40
12.0	1.26	1.37
13.0	1.59	1.77
15.0	2.09	1.75
15.7	4.10	2.81
16.0	6.58	4.66
16.6	15.51	11.77
18.0	37.07	30.49
20.0	60.12	59.91
100.0	94.22	248.17
1000.0	67.12	23.49
3000.0	59.03	6.19

Functional Schematic

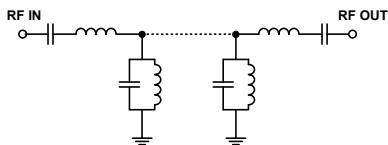

Typical Frequency Response

